

National Parks & Wildlife Service

Killyconny Bog (Cloghbally) SAC (Site code 000006)



Raised Bog Restoration Plan (Report)

Version 2

October 2022

Contents

1	INTRODUCTION	1
1.1	PURPOSE OF THE RESTORATION PLAN.....	1
1.2	KILLYCONNY BOG SAC.....	1
1.3	SITE-SPECIFIC CONSERVATION OBJECTIVES	2
2	RESTORATION MEASURES AT KILLYCONNY BOG SAC.....	2
2.1	INTRODUCTION.....	2
2.2	BLOCKING OF HIGH BOG DRAINS	3
2.3	BLOCKING OF DRAINS ON CUTOVER BOG	4
2.4	CONTOUR BUNDING	6
2.5	CELL BUNDING.....	7
2.6	GENERAL SITE MANAGEMENT	8
3	DRAINAGE MANAGEMENT PLAN	9
4	COMMUNITY BENEFITS	9
5	RESTORATION PLAN IMPLEMENTATION	10
5.1	PREPARATORY ACTIONS.....	10
5.2	PROGRESS TO DATE	11
5.2.1	<i>Hydrological characterisation</i>	<i>11</i>
5.2.2	<i>Review of proposed restoration measures in line with best practice at time of implementation.....</i>	<i>12</i>
5.2.3	<i>Detailed ecological surveys</i>	<i>12</i>
5.2.4	<i>Landownership Investigations.....</i>	<i>13</i>
5.2.5	<i>Stakeholder consultation and community engagement</i>	<i>14</i>
5.2.6	<i>Compensation/land acquisition</i>	<i>14</i>
5.2.7	<i>Appropriate Assessment Screening.....</i>	<i>14</i>
5.2.8	<i>Compilation of tender/construction documents and Health & Safety file</i>	<i>14</i>
5.2.9	<i>Surveying setting/out of the Works</i>	<i>15</i>
5.2.10	<i>Implementation of restoration measures.....</i>	<i>16</i>
5.2.11	<i>Post-Works inspections and preparation of as built survey information.....</i>	<i>16</i>
5.2.12	<i>Update of restoration plan to outline Works completed and remaining Works required in future.</i>	<i>17</i>
6	REFERENCES	20
	GLOSSARY & ACRONYMS	21

Maps:

Map 1 - Killyconny Bog SAC Boundary.....	18
Map 2 - Killyconny Bog SAC Restoration Proposals	19

1 Introduction

1.1 Purpose of the Restoration Plan

This restoration plan has been developed by National Parks and Wildlife Service (NPWS) of the Department of Housing, Local Government and Heritage to set out proposals for restoration of raised bog and associated habitats at Killyconny Bog (Cloghbally) Special Area of Conservation (SAC) (000006) (here-in-after referred to as Killyconny Bog). This plan identifies technically feasible restoration measures for the various zones of the bog including the high bog, cutover bog and surrounding margins and provides details of progress on implementation of the restoration plan.

The restoration measures set out will enable nature conservation targets for Active Raised Bog (ARB) at this SAC to be met. Although the focus of the restoration plan is on ARB habitat, it is anticipated that restoration measures will also benefit other peatland habitats and can contribute to socio-economic benefits for the local community, improvements to biodiversity and reduced carbon emissions. Monitoring of this restoration plan will be undertaken to ensure that the intended restoration measures are successfully contributing to the achievement of the site-specific targets for ARB at Killyconny Bog SAC.

Killyconny Bog is one of 12 project sites where comprehensive restoration was funded under the EU LIFE 2014-2020 programme to restore active raised bog in Ireland's raised bog SAC network (LIFE Nat/IE/000032).

Action 1.1: Develop restoration plan further in partnership with stakeholders.

This restoration plan will be developed further in conjunction with stakeholders to ensure that restoration is carried out in such a way that the conservation requirements of the site can be met, whilst minimising any impacts on adjacent land and maximising benefits to the local community. The plan will develop and change over time through input from stakeholders and **will be considered a living document**. The primary aim of this restoration plan is to ensure site-specific conservation objectives for Killyconny Bog SAC can be met.

Section 2 of the restoration plan sets out the restoration measures that have been proposed for Killyconny Bog. Section 3 outlines how a drainage management plan for Killyconny Bog has been developed to support the implementation of this restoration plan. Section 4 describes potential for community benefits to be explored through the plan and Section 5 outlines progress with implementation of the plan at Killyconny Bog.

Map 1 outlines the location and extent of Killyconny Bog. Map 2 illustrates the restoration measures that have been implemented to date as well as any proposed/outstanding restoration measures to be implemented at Killyconny Bog.

This document provides an outline of the restoration plan but is supported by detailed datasets that are available on the NPWS Restoration Maps Viewer. This map viewer provides NPWS with an up-to-date view of all restoration plan details and supporting information including status of landowner investigations, landowner consent, progress with construction and details of proposed and remaining restoration measures.

1.2 Killyconny Bog SAC

Killyconny Bog is a raised bog situated approximately half-way between Virginia and Kells on the Cavan/Meath border and some 8km from each. It is underlain by Lower Palaeozoic shales and consists of two small basins which have coalesced over a low drumlin ridge. There are few raised bogs in the north-east region and Killyconny Bog seems to be one of the best developed. Though some marginal drainage and cutting has taken place, the central part of the bog is relatively intact.

The SAC has been selected for two Annex I habitats. These are:

- [7110] Active raised bogs*
- [7120] Degraded raised bogs still capable of natural regeneration

*Priority habitats

This restoration plan has been developed to address restoration measures for these peatland habitats. The bog is surrounded to the north and west by cutover bog and to the south and west by a mosaic of commercial forestry, cutover bog, scrub and rough grassland. There have been significant restoration efforts carried out on the bog and in the surrounding cutover in the past. A Coillte plantation was clear felled with subsequent drain blocking carried out as part of a Coillte LIFE-funded nature conservation project (LIFE 04 NAT/IE/000121). Drain blocking on the high bog and cutover bog, along with construction of a high bog bund and marginal bund/barrier dam on the cutover was carried out by NPWS in 2008. These Works led to very positive impacts across the bog, with significant rewetting associated with drain blocking and installation of the marginal bund/barrier dam on the cutover reported by Crowley et al. (2021). The remaining restoration measures required at Killyconny Bog were substantially completed through the EU LIFE funded Living Bog Project (LIFE Nat/IE/000032). This project involved extensive drain blocking on the high bog and cutover areas, installation of new overflow outlets within the marginal bund and a cell bund trial on cutover bog.

1.3 Site-specific conservation objectives

Detailed site-specific conservation objectives (SSCOs) aim to define the favourable conservation condition of a habitat or species at site level. The maintenance of habitats and species within sites at favourable condition will contribute to the maintenance of favourable conservation status of those habitats and species at a national level.

A conservation objective has been set for Killyconny Bog SAC for ARB habitat using attributes and targets based on parameters set out in the Habitats Directive. In summary, one of the key targets is to restore the area of ARB to 13.2 ha. The area of ARB was reported as 3.9 ha during the 2011 monitoring survey and it has been determined that there is potential for 4.8 ha of Degraded Raised Bog (DRB) to be restored to ARB on the high bog following restoration measures. There is also long-term potential for 4.5 ha of bog peat-forming habitats (BPFH) to develop if restoration measures are undertaken on cutover areas. Several targets have been set for other attributes relating to the quality and condition of ARB habitat, including a target to restore adequate transitional areas to support/protect the active raised bog and the ecosystem services it provides. The restoration measures proposed by this restoration plan aim to achieve these targets. Further information on the SSCO's can be found in the Killyconny Bog SAC conservation objectives document (NPWS, 2015a) and the conservation objectives supporting document – raised bog habitats (NPWS, 2015b).

2 Restoration measures at Killyconny Bog SAC

2.1 Introduction

Hydrological processes are key drivers of raised bog ecology, as raised bogs are predominately fed by precipitation. For ARB to develop or be maintained, mean water levels need to be near or at the bog's surface for most of the year. Seasonal fluctuations should not exceed 20cm below ground surface, and water levels in the peat should be within 10cm of the surface, except for very short periods of time (Kelly & Schouten 2002). Gentle slopes that limit intermittent lateral losses of water (through surface run-off) and encourage sustained water-logging are the most favourable to achieve these conditions. These conditions may be maintained on steeper slopes in areas of focused flow (flushes) (Mackin et al., 2017a; Regan et al., 2020). However, it will not be possible to raise the water level to high enough levels across the entire high bog surface, particularly approaching marginal

areas, to enable ARB to develop. Even in high bog areas that do not have potential for ARB to form, water levels should be raised as necessary to support habitat for the areas where ARB can occur.

The main aim of restoration on raised bogs is to maintain or improve the quality of existing areas of ARB or improve the hydrological conditions that will allow ARB to develop in areas with suitable topographic conditions (gentle slopes and/or areas of focused flow). This requires measures to be implemented on both the high bog and cutover areas. Measures implemented on selected areas of cutover will also help to minimise the impact that drainage and cutting has had on the hydrological integrity of the high bog and support a diversity of other transitional wetland habitats (e.g., wet woodland and fen), as well as the species they sustain. Once restored, these transitional cutover zones may provide further ecosystem services through flood attenuation and water supply maintenance and purification, increased carbon sequestration and improvements to the site's overall biodiversity value.

The main restoration measures that may be considered for improving hydrological conditions on raised bogs include:

- Drain blocking (includes drains on both high bog and the margins)
- Removal of forestry/tree clearance
- Installation of marginal dams
- High bog excavation/re-profiling
- Inoculation with *Sphagnum* species
- Bunding on high bog or cutover bog.

Further details on each of these measures can be found in the Irish Wildlife Manual No. 99 'Best practice in raised bog restoration in Ireland' (Mackin et al, 2017b). Additional measures may be considered in particular instances where there are specific problems that are causing damage to an SAC. The most relevant restoration measures for Killyconny Bog SAC are outlined in Section 2.2 – 2.5 below.

2.2 Blocking of high bog drains

Blocking high bog drains slows the flow of water off the surface of the bog and increases the water table in the peat. Drain blocking is a proven and effective restoration measure on Irish raised bogs with minimal maintenance requirements. The approach has been demonstrated at a number of raised bogs in Ireland with very positive results evident in less than 10 years (**Figure 2.1**) as outlined by Fernandez *et al.* (2014a).

Sometimes, there are concerns from local communities living close to raised bogs that drain blocking on the high bog will result in, or exacerbate, flooding. Blocking high bog drains, in fact, slows the flow of water off the bog potentially reducing the frequency and magnitude of flood events by restoring the hydrological function of the bog. To address these concerns NPWS developed a drainage management plan for Killyconny Bog in advance of the implementation of the restoration plan, with further details of this plan outlined within section 3.



Figure 2.1 Overgrown peat dams showing *Sphagnum* regeneration above a dam

Action 2.1: Block any remaining unblocked high bog drains within Killyconny Bog SAC and continue to monitor past drain blocking activities.

There are relatively few functional drains on Killyconny Bog, as most drains were blocked in the past as part of restoration projects carried out by NPWS/the Living Bog Project. All remaining unblocked drains on the high bog surface should be blocked with peat dams. Details of the locations of unblocked drains on the high bog can be found in Map 3.

2.3 Blocking of drains on cutover bog

Blocking of cutover drains slows the flow of water off the cutover areas and increases the water table in the surrounding peat. This can help to reduce the rate of infiltration through the high bog and can lead to conditions that allow peat to form on the cutover (**Figure 2.2**).

Drain blocking on cutover areas has been carried out at a number of raised bogs in Ireland to date resulting in the development of peat-forming vegetation on cutover areas. As with blocking of high bog drains, there are sometimes concerns from local communities living close to raised bogs that drain blocking on cutover bog will result in, or exacerbate, flooding. Blocking drains on cutover bog can slow the rate at which water is lost from the bog therefore potentially reducing the frequency and magnitude of downstream flood events. This restoration measure is primarily focused on former spread-grounds and only in very rare occasions, where it is absolutely essential, includes agricultural land. Drains in these areas will only be blocked in agreement with landowners and where there is a

suitable hydrological barrier such as a functional drain to prevent impacts outside of the restoration area.



Figure 2.2 Water table at the surface of cutover bog in Killyconny following successful drain blocking resulting in *Sphagnum* development less than 10 years after drain blocking (this was previously an area of bare peat)

Action 2.2: Block any remaining unblocked drains on selected cutover areas within Killyconny Bog SAC.

Most of the drains on the cutover at Killyconny Bog SAC were blocked either by NPWS in 2008 or by the Living Bog Project. There are a small number of drains that could not be blocked as part of the Living Bog Project but are proposed to be blocked. These drains should be blocked, primarily with peat dams, with some plastic reinforcements where necessary to prevent erosion. In some areas complete blocking with peat dams is not feasible therefore partial blocking using plastic dams may be required. The required conditions are for the water table to be maintained at or close to the surface, therefore large areas of standing water or deep pools are not desired. Details of the locations on the cutover where it drains have already been blocked or are proposed to be blocked can be found in Map 2.

2.4 Contour bunding

Contour bunds on the high bog aims to reduce the rate of lateral flow through the upper layers of the peat. In contrast to some other bunding techniques, contour bunding is not intended as a means of impounding surface water. This method involves excavating a trench 1.5-2.0m deep, re-compacting peat into the trench and building a slightly raised bund 25-30cm above the current ground surface. In addition, these bunds have 5m long 'finger bunds' constructed using the same technique at approximately 25m spacing to prevent flow along the bund which may lead to erosion. After 1-2 years it is anticipated that the bund will have subsided close to current ground level and therefore will not appear as a prominent feature on the bog surface.



Figure 2.3 Example of a contour bund constructed at Killyconny Bog SAC

Contour bunds are most effective where there is cracking or slumping in the upper layers of the peat as the re-compacted trench assists in sealing up these cracks and slows the flow rate through the peat, supporting a higher water table behind the bund. The key issue with this technique is that the extent of the impact extending back into the bog depends on the hydraulic gradient (which is closely correlated to surface slope). As a result, the extent of impact from such bunds is likely to be extremely limited where the surface slope at the margins is steep. This method is best suited to sites with a relatively gentle slope towards the margins or as a means of effectively blocking a dense network of shallow surface drains on the high bog. Ground conditions will play an important factor in whether the bund can be constructed in such circumstances, therefore this method is most effective on drier sites where machines can operate safely and effectively.

Action 2.3: Assess the feasibility of constructing further contour bunding at Killyconny Bog SAC

One of the first trials of contour bunding in Ireland was completed at Killyconny Bog SAC. There was significant cracking and subsidence at the edges of the bog associated with peat extraction and a single linear bund was constructed close to the high bog margin. Overall, the trial suggested the bunding was relatively ineffective as the slopes were too steep and there was flow along the bund leading to bund erosion. Nevertheless, the trial was extremely beneficial as it allowed further

development of the technique to target only suitable topographic areas. Ongoing reviews of the restoration plan should determine whether further application of this measure at Killyconny is necessary. Further opportunities for implementation of this measure should consider the response of the vegetation to existing restoration measures.

2.5 Cell bunding

Cell bunding involves the creation of individual cells, consisting of a cutoff walls extending into the peat substrate and protruding above the ground surface to create a water table close to or slightly above the ground surface (maximum depth typically 10-20cm). The approach permits the interception of laterally flowing groundwater by low permeability cutoff walls, while the surface bunds prevent lateral discharge of surface water; this also encourages recharge to the underlying water table, helping contribute to the water balance, while also maintaining an elevated water table in those areas up gradient of standing water. Due to topographic variability the depth of water will also vary significantly resulting in enhanced ecological diversity across the bunded area.

Cell bunds are typically constructed by excavating a trench 1.0-1.5m deep, recompacting the excavated peat into the trench and constructing a bund 0.5-0.6m high above the ground surface. Water level control structures (pipes or overflow weirs) are incorporated into these cells as a means to regulate water levels and evenly distribute water across the site.

An early example of cell bunding was trialled at Killyconny Bog SAC. This involved the construction of a single large marginal bund at the edge of the cutover. The slopes on the cutover at Killyconny are very gentle, resulting in a very positive impact from the construction of the bund as reported by Crowley et al. (2021) and illustrated in Figure 2.4. Their study demonstrated that 5.0ha of *Sphagnum*-rich regenerating bog vegetation has developed across the 26.9ha study site since restoration Works were implemented. The study also noted the key importance of topography in determining restoration potential, as extremely fine variations in topography resulted in significant differences in the vegetation that has developed.



Figure 2.4 Example of vegetation response to construction of a large marginal bund at Killyconny Bog SAC. Left shortly after construction in 2008, Right: vegetation development in 2014.

The trial at Killyconny was extremely successful in improving conditions on the cutover but has also provided significant knowledge and understanding to be able to refine the method for application at

other sites. Some of the key learnings from this trial was the need to design bunding measures according to the topography, which is why all bunding is now designed initially using LiDAR data and where necessary, designs refined on the ground with high accuracy GPS units. In addition, the need for finger bunds is apparent as well as the benefits of creating small cells to minimize wave action and reduce the reliance on a single outflow point. As part of the Living Bog project, the outlets from the marginal bund at Killyconny were replaced by much more robust structures that allowed water levels to be maintained at target levels.



Figure 2.5 New outlet being installed in a large marginal at Killyconny Bog.

Additional cell bunding was constructed at Killyconny Bog SAC by the Living Bog Project in an area identified as relatively dry following drain blocking measures.

Action 2.4: Monitor existing marginal dam and cell bunding at Killyconny Bog SAC and consider the potential for further implementation of this measure

Marginal dams were constructed by NPWS in the past and cell bunding was trailed in specific parts of the cutover at Killyconny as part of the Living Bog Project. There may be potential for cell bunding on some additional areas of the cutover. Further opportunities for implementation of this measure should consider the response of the vegetation to existing restoration measures. Details of the locations of existing cell bunding can be found in Map 2.

2.6 General site management

In addition to the proposed measures, it is important that the restoration plan contributes to improving general site management. This includes considering issues such as:

- Fire prevention and response
- Management of littering/fly-tipping

Burning of the high bog can result in significant damage to a raised bog by removing peat-forming

vegetation which reduces the capacity of the peat to retain water. This causes much more rapid surface run-off and therefore can result in more widespread drying out and increased peak flows in surrounding streams.

Issues such as littering and fly-tipping are common problems at raised bogs and need to be considered. Depending on the nature of the material dumped this can lead to pollution in surrounding areas.

Action 2.5: Prepare a fire prevention and control plan for Killyconny Bog SAC in consultation with local stakeholders.

It is proposed that a fire prevention plan is developed for Killyconny Bog SAC to identify past occurrences of fires, the likely causes and develop an effective plan to prevent fires in future as well as an appropriate response should a fire occur in the future. Issues such as fire prevention and management of littering/fly-tipping also need to be addressed as part of a wider strategy of raising public awareness on the importance of these habitats.

3 Drainage Management Plan

One issue that can cause concerns, particularly for local stakeholders, relates to whether restoration may result in increased flooding in the surrounding area. In many instances bog restoration has the opposite effect by returning more natural hydrological conditions whereby flow is attenuated and reaches the surrounding watercourses more slowly than when drains were present. This is evident at bogs such as Killyconny Bog SAC (000006) where extensive restoration has been carried out on cutover bog and there have been no adverse impacts on adjoining agricultural land.

Nonetheless, many individuals may remain unconvinced on these issues until several years after restoration has taken place. Therefore, in order to provide reassurance, an integrated drainage management plan for the bog and its surroundings has been developed as part of this restoration plan. The drainage management plan is intended to support the conservation objectives for Killyconny Bog SAC by ensuring the drainage network can be maintained without impacting on the conservation objectives. The plan assesses instances of existing impediments to the effective management of the drainage network (e.g., undersized culverts or channels) and provides recommendations in relation to remedial Works and maintenance Works going forward. Implementation of such measures will ensure that the risk of flooding will be significantly reduced

Action 3.1: Engage with local stakeholders in relation to the implementation of recommendations of the Drainage Management Plan for Killyconny Bog SAC.

Implementing the recommendations of this plan will require engagement with local stakeholders to ensure any management actions completed are carried out in line with best practice guidance.

4 Community benefits

Through consultation with the local community and other stakeholders it will be possible to develop ideas for maximising socio-economic benefits for the local community through restoration. These might include building or improving existing facilities, where appropriate (i.e., tracks, board walks, bog bridges), encouraging the creation of small tourism enterprises, promoting the benefits to human health and well-being and enhancing the value of the site as an educational resource. There are many cases where local communities, including local businesses, are actively involved in or supporting the conservation and restoration of raised bogs across the country. Examples of this are found at Abbeyleix Bog (Co. Laois), Girley Bog Natural Heritage Area (NHA) (Co. Meath), Carrownagappul Bog (Co. Galway), Lodge Bog (Co. Kildare) and Scohaboy Bog NHA (Co. Tipperary).

Killyconny Bog already offers significant potential for recreation and amenity; there is already an access road and carpark at the site. There is also some interpretative signage (**Figure 4.1**) at the bog

and, which has assisted in increasing the educational value of the facilities.



Figure 4.1 Interpretive signage at the entrance to Killyconny Bog SAC

There is significant potential for using the tracks as access routes for amenity and recreation. There is a well-established community group, the Killyconny Bog Project which was supported throughout the Living Bog Project. Killyconny has had a high amenity value for many years, from the 'Mullagh Bog Day' festivals of the 1990's to present day walking routes around the bog.

Apart from immediate economic benefits, the restoration of raised bogs can provide many other benefits to the wider community, such as provision of clean water, flood attenuation and water flow regulation, preservation of archaeological artefacts and other sources of historical knowledge and, not least, helping Ireland reduce its national greenhouse gas emissions and, therefore, helping to combat climate change.

Action 4.1: Optimise the community benefits of the restoration plan.

As the restoration plan is further developed and implemented, opportunities to improve the recreation and amenity value of the bog and surrounding areas and promote local initiatives, while protecting and enhancing its natural values, will be explored by and with the local community. Promoting community involvement in the long-term management of the site both during and after restoration measures are carried out, will be encouraged.

5 Restoration Plan Implementation

5.1 Preparatory actions

Prior to implementation of the restoration plan several preparatory actions are required before construction of restoration measures can commence. A summary of these preparatory actions is outlined below:

- Hydrological characterisation – collation of existing hydrological data, hydrological surveys, instrumentation with monitoring data (where necessary);
- Review of proposed restoration measures in line with best practice at the time of

implementation (including exploring opportunities to implement enhanced measures);

- Detailed ecological surveys (primarily comprising surveys of cutover areas, but where necessary also includes high bog areas e.g., if ecotopes have not been surveyed in many years);
- Landownership Investigations (investigations into ownership, turbary rights etc.);
- Stakeholder consultation and community engagement (meeting with stakeholders to outline restoration plans and consider any concerns raised by the local community);
- Compensation/land acquisition (compensation or acquisition of lands required to implement the required restoration measures on private lands);
- Appropriate Assessment Screening;
- Compilation of tender/construction documents including preparation of health and safety file;
- Surveying and setting out of the Works;
- Implementation of restoration measures (including construction supervision and contract administration);
- Post-Works inspections and preparation of as-built survey information;
- Update of restoration plan to outline Works completed and remaining Works required in future. This includes updating status of all Works within the NPWS GIS-based data viewer.

5.2 Progress to date

Significant progress has been made in implementing the proposed restoration plan at Killyconny Bog SAC with all restoration Works now substantially complete. Further reviews of the restoration plan will take place as results from future ecological monitoring determines whether any additional actions are needed to achieve site specific conservation objectives for the bog. A summary of progress to date is outlined below:

5.2.1 Hydrological characterisation

Status – Complete

Detailed hydrological characterisation of Killyconny Bog SAC was carried out in 2018 as part of the Living Bog Project. This comprised of detailed surveys of the high bog and cutover to collect data to enable the restoration plan to be refined. A detailed hydrological monitoring network was established in 2018, comprising 18 phreatic monitoring wells and 8 deep piezometers to monitor vertical hydraulic gradients. All wells were monitored manually at monthly intervals, with a subset of 4 monitoring wells instrumented with automated data logging equipment. This enabled the collection of baseline data to inform restoration plan design as well as assess the hydrological impact of restoration measures. This information was used as a feedback mechanism in reviewing the restoration plan. Targeted monitoring is ongoing as part of the AfterLIFE plan of the Living Bog project which will continue until 2027 (Cushnan & Crowley, 2022).

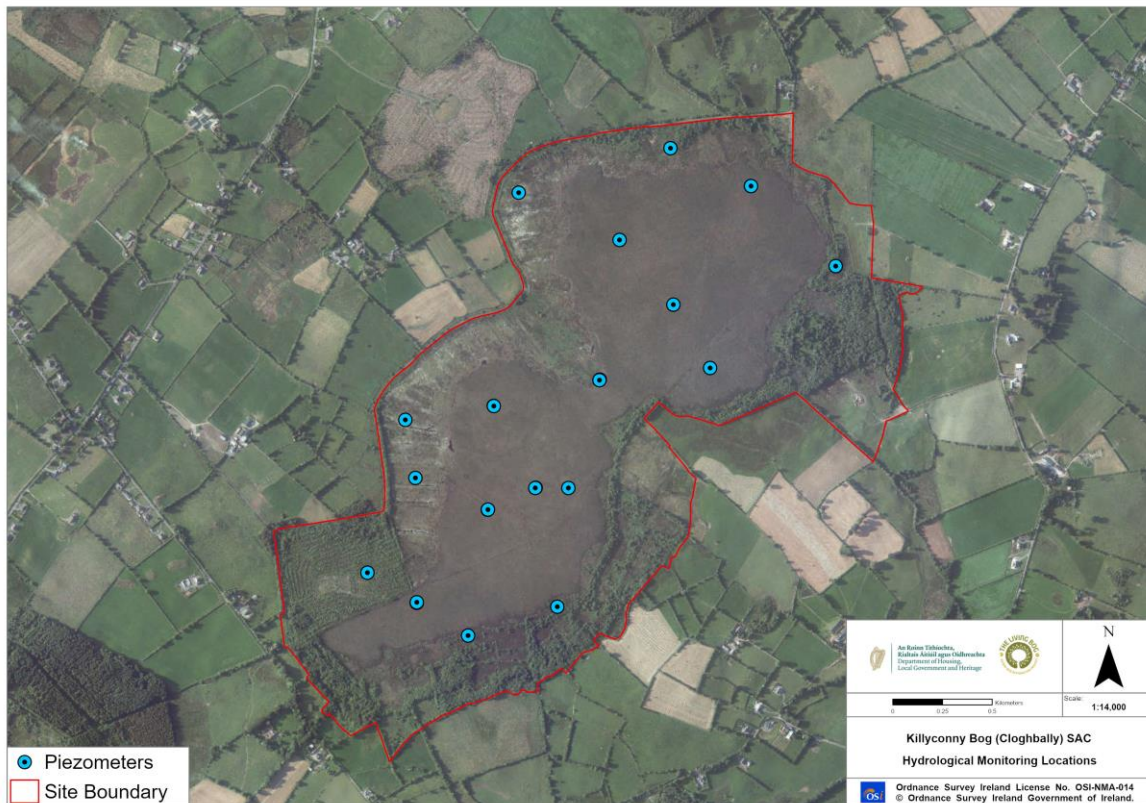


Figure 5.1 Location of hydrological monitoring network at Killyconny Bog SAC

5.2.2 Review of proposed restoration measures in line with best practice at time of implementation

Status - Complete

Following detailed hydrological characterisation of Killyconny Bog SAC in 2018, a comprehensive review of proposed restoration measures was completed which identified some minor modifications required to the restoration plan as well as the potential to implement cell bunding in targeted areas of the cutover. These bunds were completed as trial measures in 2021 and were not originally proposed as part of the Living Bog Project. Early indications suggest these measures have been very successful. Soon after bunding was completed a number of suitable locations were chosen for the transfer of samples of the Sphagnum mosses *S. beothuk* and *S. austinii*. These two species are characteristic of good quality ARB in Ireland (Kelly and Schouten, 2002; NPWS, 2019), but were still absent from the cutover on Killyconny over 10 years after the initial restoration Works were undertaken (despite their presence on the high bog) (Crowley & Smith, 2022). Further monitoring will be undertaken by NPWS in future to assess the success of this transfer experiment. Details of the restoration measures implemented at Killyconny Bog are illustrated in Map 2.

5.2.3 Detailed ecological surveys

Status - Complete

The most recent ecotope survey of Killyconny Bog SAC was completed in 2011. The site was not included in the sites resurveyed as part of the Living Bog Project; however, it will undergo ecotope survey as part of NPWS national monitoring surveys in future years. This will assess the extent of the impact of restoration measures on the high bog. In 2011, 3.9ha of ARB was mapped as occurring on the high bog, with 0.2ha comprising central ecotope and 3.7ha comprising sub-central ecotope.

Future monitoring will be completed by NPWS when the vegetation has had more time to respond to restoration measures, with a full analysis of the increase in extent of ARB scheduled to be carried out by the NPWS raised bog monitoring programme 2022-24.

In addition to the high bog survey, a methodology for detailed vegetation mapping of cutover habitats was developed as part of the Living Bog Project and published as Irish Wildlife Manual No. 128 'The Habitats of Cutover Raised Bog' (Smith & Crowley, 2020). A cutover survey carried out in accordance with this methodology was completed at Killyconny which identified that there are already 5.4ha of high *Sphagnum* areas throughout the cutover area largely as a result of past restoration measures. This area is expected to increase due to the measures implemented as part of the Living Bog project, particularly from enhanced measures such as cell bunding. The high bog and cutover surveys completed as part of the Living Bog Project provides a baseline status that can be used to monitor the results of restoration measures in future.

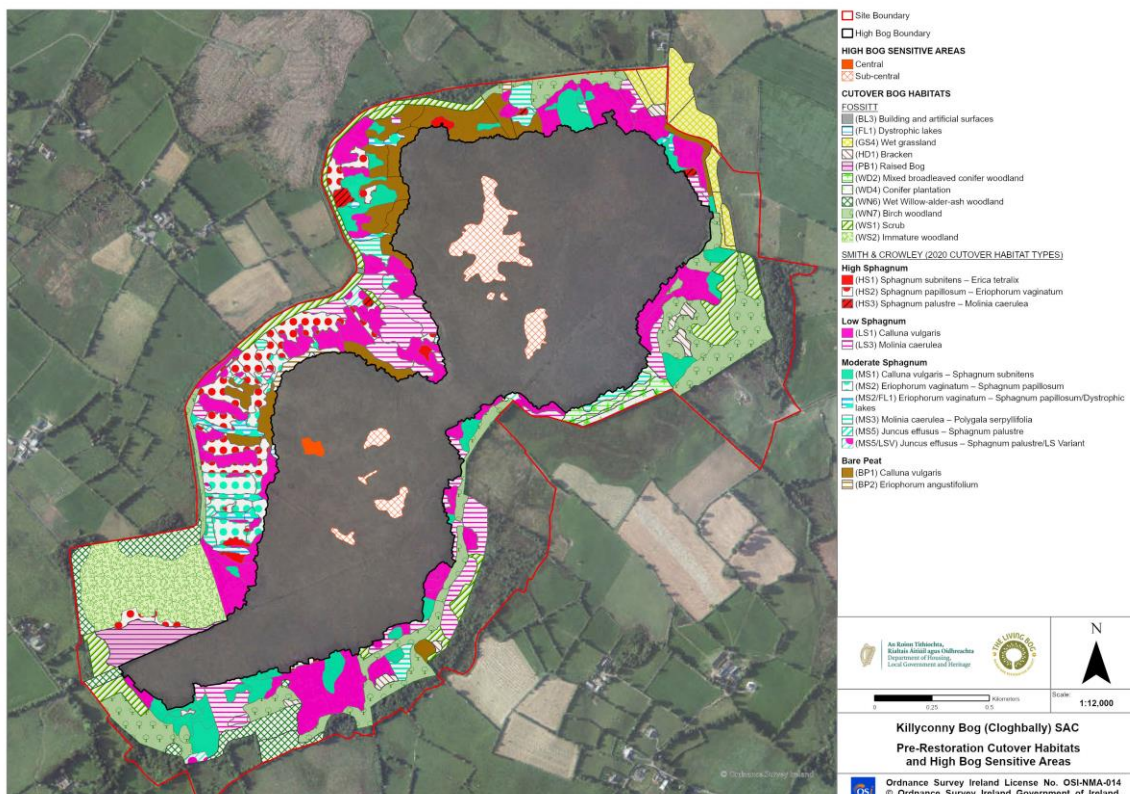


Figure 5.2 Ecological monitoring results (Pre-Restoration) at Killyconny Bog SAC illustrating high bog and cutover vegetation types. *Note* Post-Restoration results to be confirmed.

5.2.4 Landownership Investigations

Status – Complete

Comprehensive landownership investigations were completed at Killyconny Bog SAC as part of the Living Bog Project. The identified that there is a mixture of public and private ownership across the bog. In addition, there are a large number of turbary right holders. This process allowed identification of key stakeholders to meet during the stakeholder consultation and community engagement phase.

5.2.5 Stakeholder consultation and community engagement

Status – Complete

Comprehensive stakeholder consultation and community engagement was carried out at Killyconny Bog SAC as part of the Living Bog Project. The Living Bog Project team developed strong working relationships with key members of the local community, including the local community group based at the St Kilian's Heritage Centre in Mullagh town. The team held meetings with various stakeholders including previous turf cutters, landowners and interested community groups. At these meetings project aims, and restoration plans were presented to the stakeholders. This has included meeting with all private individuals owning the freehold or having a turbary right at the bog.

5.2.6 Compensation/land acquisition

Status – Complete

Compensation has been offered to and accepted by almost all landowners and turbary right holders within the bog which enabled the restoration Works to proceed at the bog.

5.2.7 Appropriate Assessment Screening

Status – Complete

An Appropriate Assessment Screening report was prepared to consider the potential for significant effects on any European Sites from the implementation of the restoration plan at Killyconny Bog SAC. As the bog has been selected as a Special Area of Conservation for the presence of raised bog habitats, the proposal to allow restoration measures to take place in Killyconny Bog SAC **is directly connected with and necessary to the management of this site as a European site**. The proposed restoration measures are essential to support the reestablishment of appropriate hydrological conditions within the SAC to enable nature conservation targets for Active Raised Bog (ARB) at this SAC to be met.

However, following a precautionary approach and to inform a risk assessment, a screening for Appropriate Assessment report was prepared to assess, in view of best scientific knowledge and in view of the conservation objectives of those European sites considered, whether or not the project, individually or in combination with other plans or projects, is likely to have a significant effect on any European site.

The findings of this screening exercise determined that the proposed restoration measures:

- Will not give rise to potential likely significant effects on the Qualifying Interests/Special Conservation Interests of any other European site within the project's zone of influence, in view of best scientific knowledge and in view of the conservation objectives of those sites; and
- Will not give rise to potential in-combination or cumulative effects with the other plans or projects considered.

5.2.8 Compilation of tender/construction documents and Health & Safety file

Status – Complete

A work package comprising details of restoration measures that could be implemented was compiled by the Living Bog Project Team, which included detailed specifications for the proposed measures. In addition, a health and safety file was compiled to ensure the Works could be carried out in accordance with the Safety, Health and Welfare at Work (Construction) Regulations. Generally, this work involves the following activities:

- Identify hazards arising from the design of the various schemes.
- Eliminate these hazards, or where not practicable to do so, reduce the risk of these hazards.

5.2.9 Surveying setting/out of the Works

Status – Complete

The surveying and staking out of drains and dams can be difficult due to the nature of the bog environment. Vegetation and soft ground conditions can make identification of features and surveying of same difficult and potentially dangerous. The setting out of the Works is generally done using bamboo stakes to mark the locations of the restoration measures that are to be constructed such as the dams or bunds. All Works carried out as part of the Living Bog Project of the restoration plan were set out as required which facilitated work being completed. This activity provides an additional opportunity to review the restoration measures in detail on the ground and where necessary minor modifications can be made (e.g., adjusting the placement of particular dams due to dense vegetation coverage or alignment of bunds due to ground conditions). This ensure that the risk of damage to the raised bog is minimized as inadequate planning can increase the risk of machines entering unsuitable areas.



Figure 5.3 Example of setting out dams on an area of high bog

5.2.10 Implementation of restoration measures

Status – Complete

All of the proposed as part of the Living Bog Project were completed as required at Killyconny Bog SAC. This includes construction of 556 dams, which were primarily constructed from peat but also included some plastic dams. In addition, a number of trial measures were completed at Killyconny including the construction of trial cell bunding in areas noted by Crowley et al. (2021) as being relatively dry and the installation of new outlets at the marginal dam on Killyconny. A techniques manual which details each of these methods including the methods developed through the Living Bog Project was produced as part of the project (Cushnan et al., 2022).

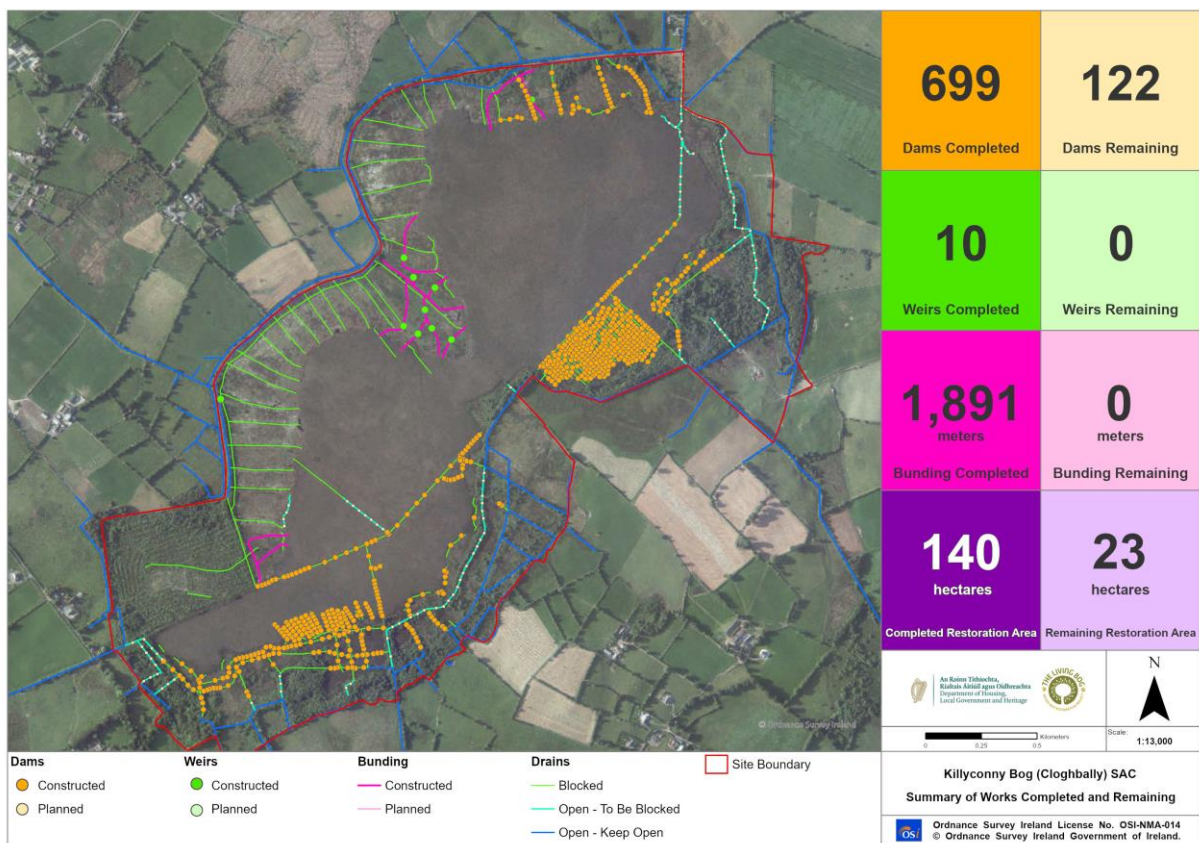


Figure 5.4 Summary of Works completed to date

5.2.11 Post-Works inspections and preparation of as built survey information.

Status – Complete

Post-Works inspections have been completed and an as-built drawing was prepared by Bord na Móna on behalf of the Living Bog Project (summarised in Figure 5.4). This included detailed aerial surveys of the bog to collect high-resolution ortho-imagery and to ensure a detailed as-built drawing could be prepared.

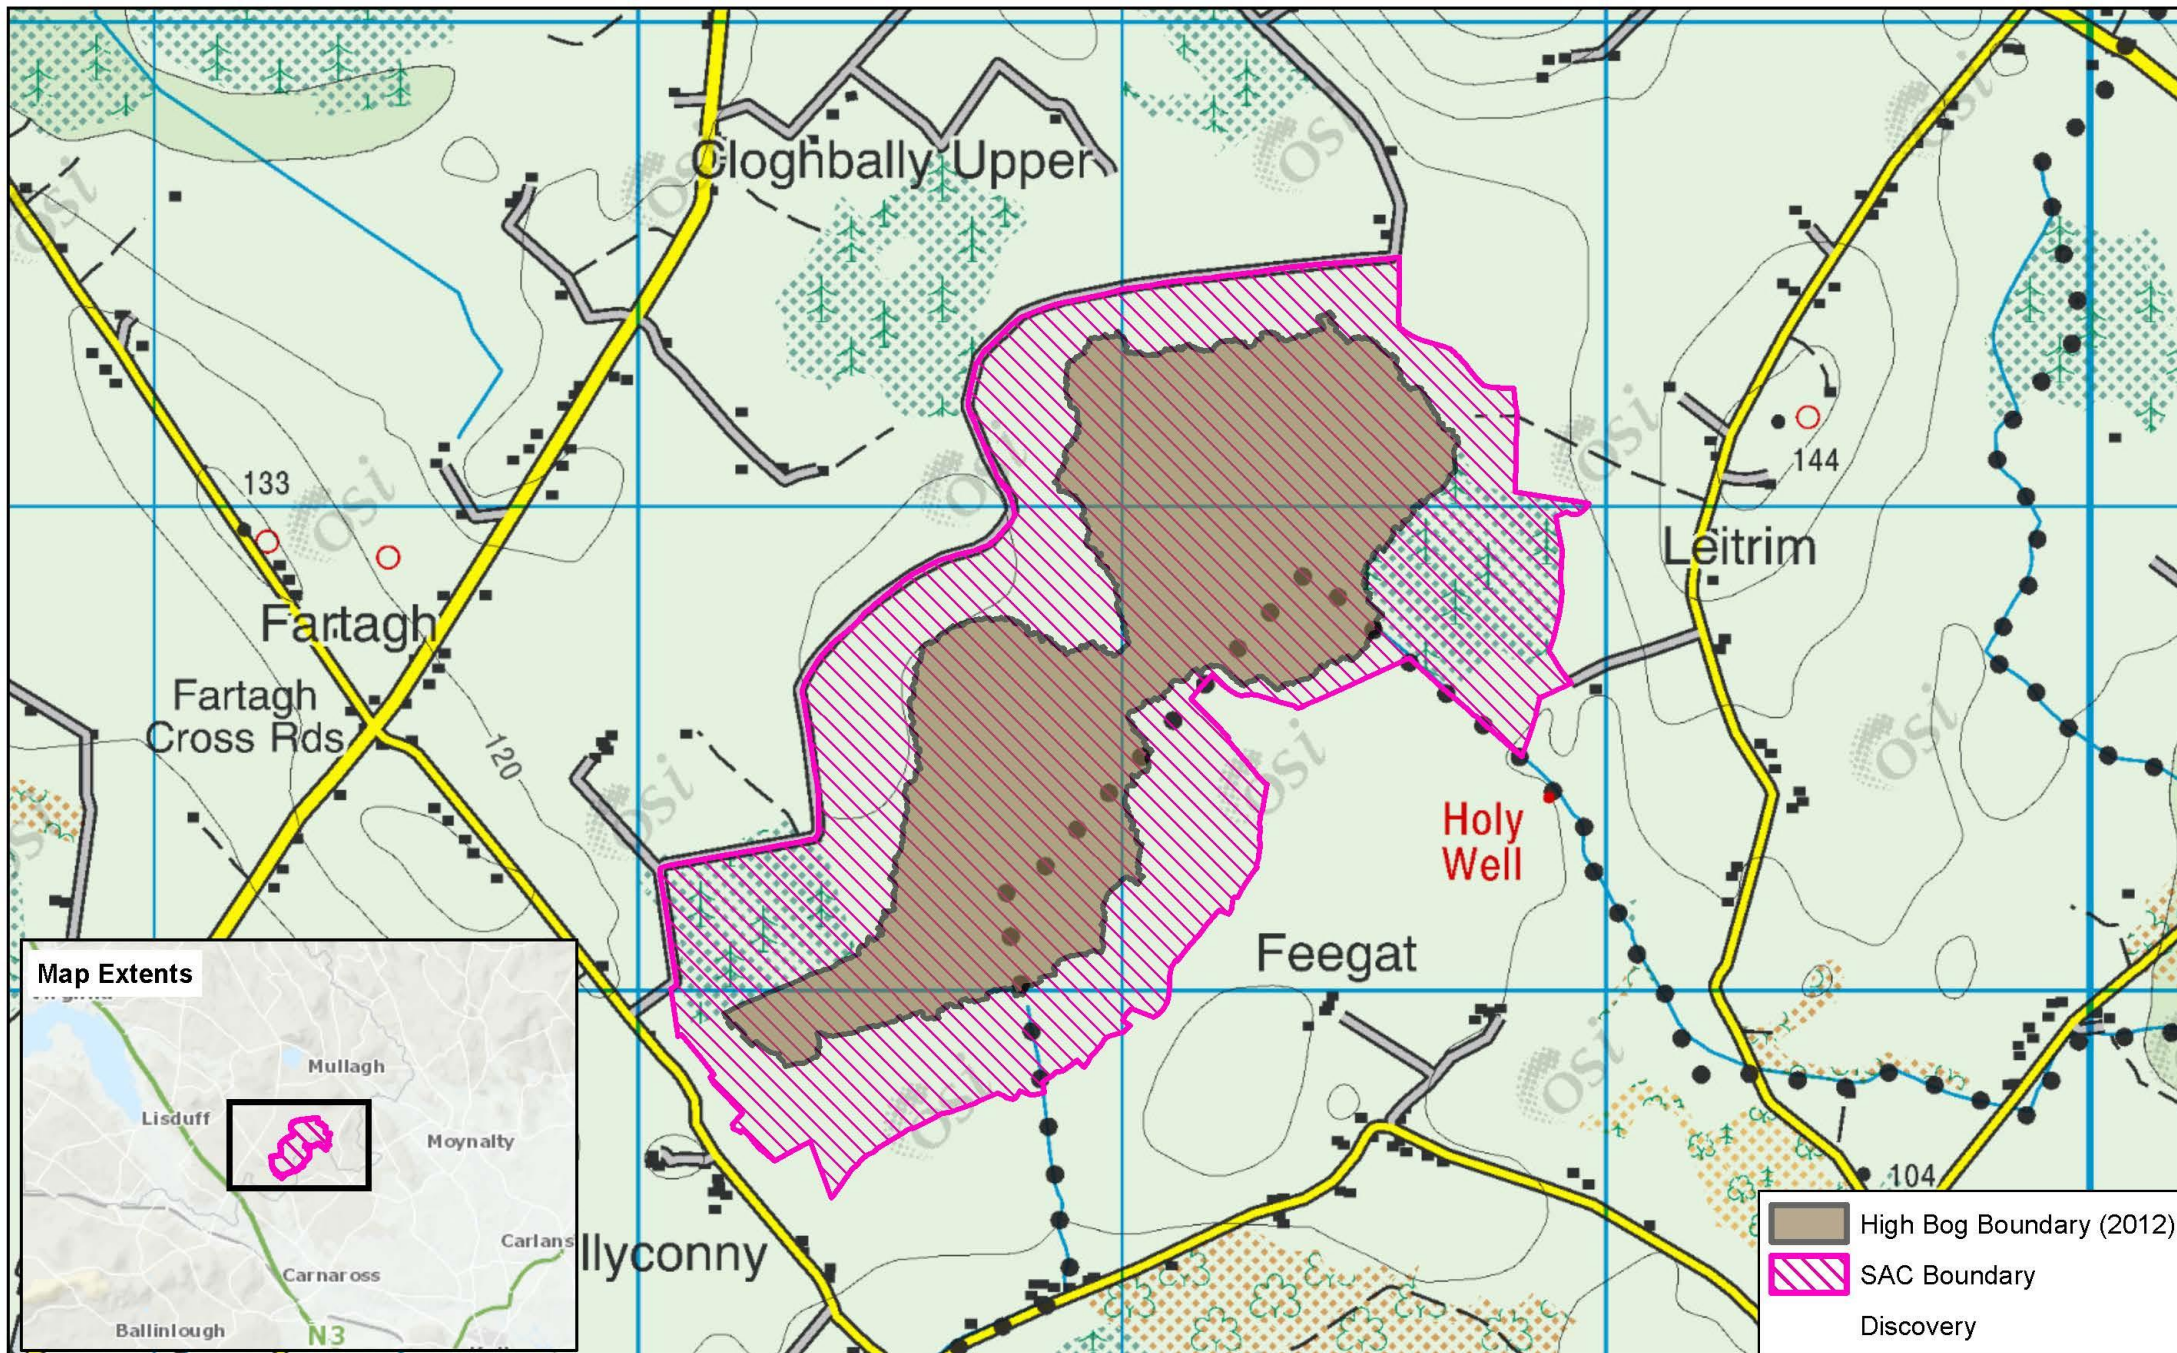


Figure 5.5 High resolution post-Works ortho imagery from UAV survey

5.2.12 Update of restoration plan to outline Works completed and remaining Works required in future.

Status – ongoing

This restoration plan has been updated with the details of the Works completed to date as part of the Living Bog and previous NPWS restoration project. At present no significant restoration Works are outstanding; however, as future monitoring surveys are completed by NPWS the need for additional restoration measures will be considered and this restoration plan updated as required. This restoration plan will also be reviewed on an ongoing basis as experience and best-practice evolves nationally and internationally.





Site Boundary

Dams

Constructed (699)

Planned (122)

Weirs

Constructed (10)

Planned (0)

Bunding

Constructed (1,891 m)

Planned (0 m)

Drains

Blocked (17.8 km)

Open - To Be Blocked (3.0 km)

Open - Keep Open



An Roinn Tithíochta,
Rialtais Airiúil agus Oidhreachta
Department of Housing,
Local Government and Heritage



N



0 0.25 0.5 Kilometers

Scale: 1:11,000

Killyconny Bog (Cloghbally) SAC
Restoration Progress



Ordnance Survey Ireland License No. OSI-NMA-014
© Ordnance Survey Ireland Government of Ireland.

Map 2 - Killyconny Bog SAC Restoration Proposals

6 References

- Crowley, W., Smith, G.F., Mackin, F., Regan, S., Fernandez Valverde, F. and Eakin, M. 2021 Recovery of the vegetation of a cutover raised bog in Ireland following rewetting measures. *Biology and Environment: Proceedings of the Royal Irish Academy* 2021. DOI: 10.3318/ BIOE.2021.09
- Crowley, W. and Smith, G. F. (2022) Restoring Active Raised Bog in Ireland's SAC Network 2016 – 2020 (LIFE14 NAT/IE/000032): D2: Vegetation Monitoring Final Report. The Living Bog Project/National Parks and Wildlife Service, Ireland. (<https://raisedbogs.ie/wp-content/uploads/2022/09/Appendix-7-D2-Vegetation-Monitoring-Final-Report.pdf>)
- Cushnan, H. and Crowley, W. (2022) Restoring Active Raised Bog in Ireland's SAC Network 2016 – 2020 (LIFE14 NAT/IE/000032): AfterLIFE Hydrology & Vegetation Monitoring Plan. The Living Bog Project/National Parks and Wildlife Service, Ireland. (<https://raisedbogs.ie/wp-content/uploads/2022/09/Appendix-29-F6-AfterLIFE-Hydrology-Monitoring-Plan-D002.pdf>)
- Cushnan, H., O'Hara, S., Kieran, P., Mackin, F. (2022) Restoring Active Raised Bog in Ireland's SAC Network 2016 – 2020 (LIFE14 NAT/IE/000032): LIFE Technical Manual – Review of Best Practice Measures. The Living Bog Project/National Parks and Wildlife Service, Ireland. (<https://raisedbogs.ie/wp-content/uploads/2022/09/Appendix-23-E10-LIFE-Projects-Technique-Manual-D01.docx.pdf>)
- Fernandez, F., Connolly K., Crowley W., Denyer J., Duff K. & Smith G. (2014) Raised bog monitoring and assessment survey 2013. *Irish Wildlife Manuals*, No. 81. National Parks and Wildlife Service, Department of Arts, Heritage and Gaeltacht, Dublin, Ireland.
- Fossitt, J. (2000) *A Guide to Habitats in Ireland*. The Heritage Council, Ireland.
- Kelly, L. & Schouten, M.G.C. (2002) Vegetation. In: Schouten, M.G.C. (ed.), *Conservation and restoration of raised bogs: geological, hydrological and ecological Studies*. Dúchas – The Heritage Service of the Department of the Environment and Local Government, Ireland; Staatsbosbeheer, the Netherlands; Geological Survey of Ireland, Dublin. pp. 110-169.
- Mackin, F., Barr, A., Rath, P., Eakin, M., Ryan, J., Jeffrey, R. & Fernandez Valverde, F. (2017a) Best practice in raised bog restoration in Ireland. *Irish Wildlife Manuals*, No. 99. National Parks and Wildlife Service, Department of Culture, Heritage and the Gaeltacht, Ireland.
- Mackin, F., Flynn, R., Barr, A & Fernandez-Valverde, F. (2017b) Use of geographical information system-based hydrological modelling for development of a raised bog conservation and restoration programme. *Ecological Engineering*, 106(Part A); pp. 242-252.
- NPWS (2015a) Killyconny Bog SAC (site code 000006) Conservation objectives. National Parks and Wildlife Service, Ireland. (http://www.npws.ie/sites/default/files/protected-sites/conservation_objectives/CO000006.pdf)
- NPWS (2015b) Killyconny Bog SAC (site code 000006) Conservation objectives supporting document - raised bog habitats. National Parks and Wildlife Service, Ireland. ([http://www.npws.ie/sites/default/files/publications/pdf/Killyconny%20Bog%20\(Cloghbally\)%20SAC%20\(000006\)%20Conservation%20objectives%20supporting%20document%20-%20Raised%20Bog%20habitats%20\[Version%201\].pdf](http://www.npws.ie/sites/default/files/publications/pdf/Killyconny%20Bog%20(Cloghbally)%20SAC%20(000006)%20Conservation%20objectives%20supporting%20document%20-%20Raised%20Bog%20habitats%20[Version%201].pdf))
- Regan, S., Swenson, M., O'Connor, M. & Gill, L. (2020). *Ecohydrology, Greenhouse Gas Dynamics and Restoration Guidelines for Degraded Raised Bogs*. A report prepared for the Environmental Protection Agency, Ireland.
- Smith, G.F. & Crowley, W. (2020) The habitats of cutover raised bog. *Irish Wildlife Manuals*, No. 128. National Parks and Wildlife Service, Department of Housing, Local Government and Heritage, Ireland.

Glossary & Acronyms

ACTIVE RAISED BOG (ARB)	Areas of uncut raised bog where the conditions are right for peat to continue to form, and where species of plants and animals typical to intact bogs can thrive. ARB is listed as a priority habitat in Annex I of the Habitats Directive.
ANNEX I	Annex I of the EU Habitats Directive lists natural habitats types of Community interest whose conservation requires the designation of SACs.
ANNEX II	Annex II of the EU Habitats Directive lists animal and plant species of Community interest whose conservation requires the designation of SACs.
BIODIVERSITY	A general term used to describe all aspects of biological diversity including the number of species present in a given environment, the genetic diversity present within a species and the number of different ecosystems present within a given environment.
BOG WOODLAND	Woodland formed on a wet peaty substrate, with permanently high groundwater level. The water is poor in nutrients (ombrotrophic) and the ground surface has high cover of bog moss species, with active peat accumulation taking place. Bog Woodland is listed as a priority habitat in Annex I of the Habitats Directive. It differs from dry woodland on bog where peat accumulation is not taking place.
BUNDING	An impervious embankment of material (peat or other) that provides a barrier to retain water behind it.
CARBON SEQUESTRATION	The capture and long-term storage of atmospheric carbon dioxide, including that accumulated by a bog or fen.
CATCHMENT	An area of land contributing water that drains to a defined point. The term river catchment refers to the area of land that drains into a particular river system and is synonymous with the term drainage basin or watershed.
CUTOVER	Areas of bog that have been previously cut (by hand or by mechanical means), although not down to the underlying inorganic substrate. Cutover areas normally consist of a mosaic of cut areas, face banks, pools, drainage ditches, uncut areas of peat, scrub, grassland etc.
DEGRADED RAISED BOG (DRB)	The area of high, uncut bog which has been damaged by human activities but which could be restored to active raised bog again through restoration measures within a period of 30 years. It is listed in Annex I of the Habitats Directive.
ECOLOGY	The study of the interactions between organisms, and their physical, chemical and biological environment.
ECOSYSTEM SERVICES	Humankind benefits from a multitude of resources and processes that are supplied by ecosystems. Collectively, these benefits are known as ecosystem services and include products like clean drinking water and processes such as the decomposition of wastes.

EROSION	The processes whereby the materials of the earth's crust are dissolved, or worn away and simultaneously moved from one place to another by natural processes which include weathering, solution, corrosion and transportation.
EVAPOTRANSPIRATION	Water loss to the atmosphere from soil and other surfaces (evaporation) and vegetation (transpiration).
FACEBANK	Areas at the edge of the high bog where peat cutting has taken place. This is an ecotope that is highly degraded and absent of typical <i>Sphagnum</i> species.
FAUNA	Animal life.
FAVOURABLE CONSERVATION CONDITION	This is the condition of a habitat or species considered to be favourable at site level. Favourable conservation condition is defined by site-specific conservation objectives (SSCOs). The maintenance of habitats and species within sites at favourable condition will contribute to the maintenance of favourable conservation status of those habitats and species at a national level.
FAVOURABLE CONSERVATION STATUS	According to the Habitats Directive the conservation status of a natural habitat will be taken as "favourable" when: its natural range and areas it covers within that range are stable or increasing, and the specific structure and functions which are necessary for its long term maintenance exist and are likely to continue to exist for the foreseeable future, and the conservation status of its typical species is favourable.
FLORA	Plant life.
FLOW ATTENUATION	Slowing flow of water out of an area. This is a common method for reducing risk of flood in urban areas whereby diversion channels store water in attenuation ponds. Intact peatlands typically offer natural flow attenuation through slowing flow as a result of higher storage capacity and increased hydraulic roughness, while degraded peatlands are much less effective at attenuating flow as the peat is dried out encouraging overland flow.
HABITAT	Refers to the environment defined by specific abiotic and biotic factors, in which a species lives at any stage of its biological cycle. In general terms it is a species' home.
HABITATS DIRECTIVE	Council Directive 92/43/EEC of 21 May 1992 on the conservation of natural habitats and of wild fauna and flora.
HEAD	Hydrological term which is a measure of the height to which water can raise itself above an arbitrary given level or datum.
HIGH BOG	The area of bog which has not previously been cut.
HYDROLOGICAL PROCESSES	The movement of water through a catchment area including freshwater and seawater inputs, water level changes and drainage mechanisms which are all influenced by the underlying geology.

LAGG	A term used to describe the natural habitat that occurs in the transitional zone between the bog and the mineral soil around a raised bog. Few intact lagg zones remain around raised bogs in Ireland as they are typically the first location to be damaged by drainage.
LIDAR	A remote sensing technology that measures vertical surface elevation by illuminating a target with a laser and analysing the reflected light usually obtained using a low-flying aeroplane. This provides detailed information on the surface elevations across an area.
LIFE	An EU financial instrument supporting environmental and nature conservation projects throughout the EU.
MARGINAL DRAIN	Drains on the margins of a raised bog typically on cutover for the purpose of draining spread-grounds to facilitate turf-cutting.
MICROTOPOGRAPHY	Variations in elevation at a relatively small scale. Generally the higher points are no more than a metre higher than the low points, and only a couple of metres across. On a high bog this consists of hummocks, hollows, pools, flats and lawns.
MINEROTROPHIC	Refers to soils and vegetation whose water supply comes mainly from streams or springs. This water has flowed over or through rocks or other minerals, often acquiring dissolved chemicals which raise the nutrient levels and reduce the acidity.
NATURAL HERITAGE AREA (NHA)	These are conservation areas designated for protection under The Wildlife (Amendment) Act 2000. NHAs are considered important for the habitats present or which holds species of plants and animals whose habitat needs protection.
NPWS	National Parks and Wildlife Service.
OMBROTROPHIC	Refers to a type of peatland that receives all of its water and nutrient from precipitation falling directly on its surface.
PIEZOMETER	A piezometer is a device used to measure head. In the case of groundwater a piezometer will provide head at a given point.
PEAT-FORMING HABITAT	These are habitats where peat is actively forming. It includes typical ombrotrophic raised bog vegetation as well as lagg or fen vegetation that indicate that peat is actively forming.
PRIORITY HABITAT	A subset of the habitats listed in Annex I of the EU Habitats Directive. These consist of habitats which are in danger of disappearance and whose natural range mainly falls within the territory of the European Union. These habitats are of the highest conservation status and require measures to ensure that their favourable conservation status is maintained.
RAISED BOG	Rain-fed peatland ecosystems that develop primarily in areas with topographic depressions, where drainage may be impeded by a high groundwater table, or by low permeability of the underlying substrata such as clay. Peat accumulation, over time, elevates the ground surface above surrounding areas to form a raised dome.
RESTORATION ZONE	A specified area within a site where restoration measures have been proposed. Restoration zones have been defined for each raised bog SAC based on factors including hydrological conditions, existing and expected

	habitats following restoration. This allows restoration measures for each raised bog SAC to be split into manageable units.
SITE-SPECIFIC CONSERVATION OBJECTIVE	A site-specific conservation objective aims to define the favourable conservation condition of a habitat or species at site level. The maintenance of habitats and species within sites at favourable condition will contribute to the maintenance of favourable conservation status of those habitats and species at a national level.
SPECIAL AREA OF CONSERVATION	Area designated for the conservation of habitats and/or species under the Habitats Directive.
SPREAD-GROUNDS	Area where turf is spread after cutting to dry out, typically drained cutover bog or agricultural areas adjacent to the high bog.
STATUTORY NATURE RESERVE	A Statutory Nature Reserve is an area of nature conservation interest that has been designated by Ministerial Order under the Wildlife Act, 1976.
SUBSIDENCE	Term referring to the sinking of land resulting from natural activity or human activity. Within peat subsidence occurs due to loss of water for example as a result of drainage.
TILL	Geological term referring to unsorted material deposited by glacial ice and showing no stratification. It is often referred to as boulder clay.
TOPOGRAPHY	The arrangement of the physical features of an area.